

CEGIP66302040GY | IP66 Glass Reinforced Polyester Enclosure



*Images are for representative purposes only

Product Description:

CTS offers hot molded compression polyester enclosures, reinforced with fiber glass suitable for outdoor installations in corrosive environments with service life exceeding 10 years.

Standards:

- IP66 Ingress Protection compliant to IEC62208
- IK10 Impact Protection compliant to IEC62202
- Double Insulation Class II : 1000Vac-1500Vdc
- Complies with RoHS and REACH Directives

Features & Benefits:


- Halogen Free Raw material
- Standard lock : Double Bar DIN43668
- Resistant to Chemical and Atmospheric Agents
- Light Weight and Requires Minimum Maintenance
- Optional Insulated or Metallic Plates
- Door with Internal hidden hinges that allows 180° opening.

General Specification:

Material	Glass Reinforced Polyester (GRP)
Dimension in mm	300 W x 200 D x 400 H 1000Vac-
Double Insulation Class	1500Vdc
Colour	Light Grey RAL 7035
Operating Temperature	-30°C +85°C



CEGIP66302040GY | IP66 Glass Reinforced Polyester Enclosure

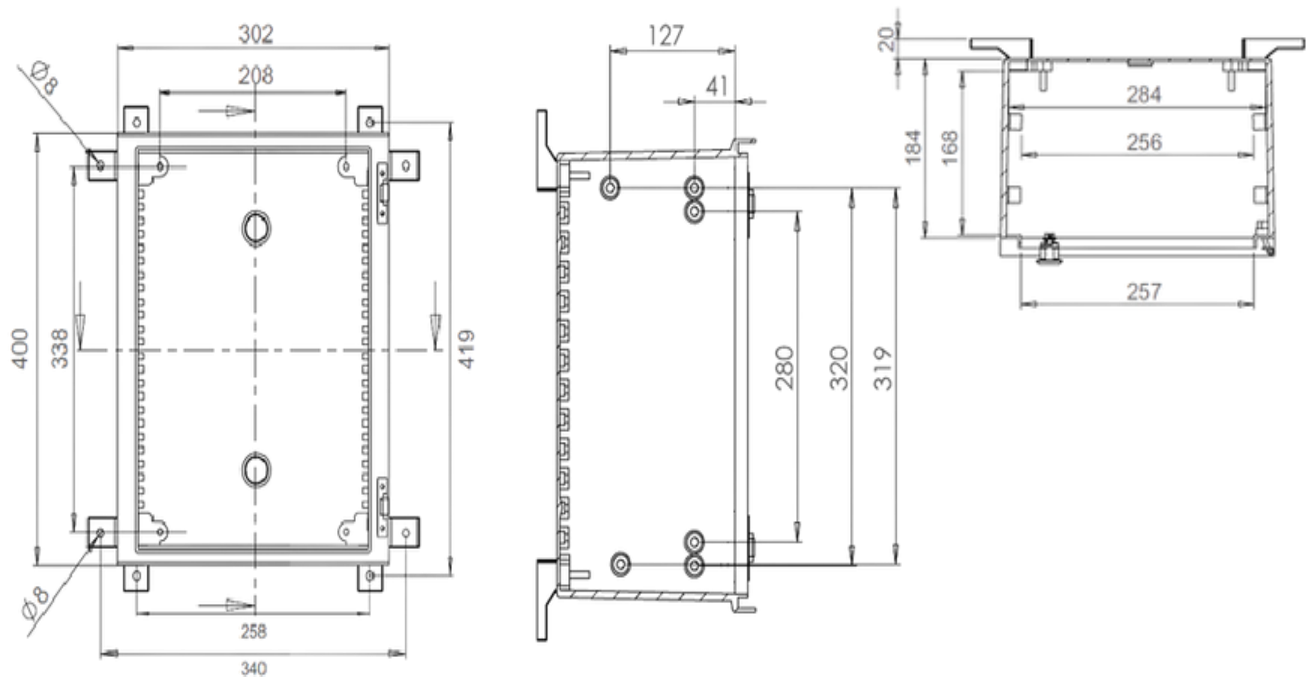

Optional Accessories:



Ordering Information:

CEGIP66302040GY CTS IP66 GRP Enclosure 300*200*400mm with lock, Light Grey RAL 7035

